

# NOMEX® TYPE 411

NOMEX® Type 411 is the uncalendered precursor of NOMEX® Type 410. It is available in five thicknesses (0.13 to 0.58 mm) (5 to 23 mil), with a density of 0.3 and correspondingly lower electrical and mechanical properties. It is used in applications such as motor phase insulation and transformer coil end filler, where high bulk and conformability are of prime importance. NOMEX® Type 411 offers increased impregnability and saturability when compared to NOMEX® Type 410, making it suitable for use in cast resin applications as turn and layer insulation.

## Electrical properties

The typical electrical property values for NOMEX® Type 411 paper are shown in Table I. The AC Rapid Rise dielectric strength data of Table I, representing voltage stress levels, withstood 10 to 20 seconds at a frequency of 60 Hz. These values differ from long-term strength potential. DuPont recommends that continuous stresses in transformers not exceed 1.2 kV/mm (30 V/mil) to minimize the risk of partial discharges (corona). The Full Wave Impulse dielectric strength data of Table I were generated on flat sheets, such as in layer and barrier applications. The geometry of the system has an effect on the actual

impulse strength values of the material. The dielectric strength data are typical values and not recommended for design purposes. Design values can be supplied upon request.

The effects of temperature on dielectric strength and dielectric constant are shown for NOMEX® Type 410 paper in Figure 1 of the NOMEX® Type 410 data sheet. Since NOMEX® Type 411 paper is identical in chemical composition to NOMEX® Type 410, its electrical properties will react similarly to temperature changes up to and including 220°C.

The insensitivity of the dielectric strength of NOMEX® papers to moisture (humidity) has been shown for NOMEX® Type 410 paper in Table II of the NOMEX® Type 410 data sheet. This also holds true for NOMEX® Type 411 paper. Although NOMEX® Type 411 papers exposed for 6 days at 96% relative humidity absorb up to 16% water, they retain at least 85% of their bone-dry dielectric strength. This is in marked contrast to most porous insulations.

## Mechanical properties

The typical mechanical property values for NOMEX® Type 411 paper are shown in Table II. The effects of temperature on tensile strength and elongation are illustrated for

# TECHNICAL DATA SHEET

NOMEX® Type 410 paper in Figure 5 of the NOMEX® Type 410 data sheet. The effects of short-term exposure to temperatures up to and including 220°C will be similar for NOMEX® Type 411 paper. In addition, however, the tensile strength of NOMEX® Type 411 can be significantly increased through heat-treatment under certain specific conditions.

## Thermal properties

Arrhenius plots of thermal aging behavior for NOMEX® are exemplified by Figures 7, 8 and 9 of the NOMEX® Type 410 data sheet. Similar aging of NOMEX® Type 411 paper at elevated temperatures has resulted in its recognition as a 220°C insulating material.

### Please note:

The properties in this data sheet are typical, or average values and should not be used as specification limits. Unless otherwise noted, all properties were measured in air under "standard" conditions (in equilibrium at 23°C, 50% relative humidity). Note that, like other products of papermaking technology, NOMEX® papers have somewhat different properties in the papermaking machine direction (MD) compared to the cross direction (XD). In some applications it may be necessary to orient the paper in the optimum direction to obtain its maximum potential performance.

Table I – **TYPICAL ELECTRICAL PROPERTIES**

Nominal thickness (mil) (mm)	5 0.13	7 0.18	10 0.25	15 0.38	23 0.58
Dielectric strength - AC rapid rise <sup>1)</sup>					
(V/mil)	220	240	240	240	230
(kV/mm)	9	9	9	9	9
- Full wave impulse <sup>2)</sup>					
(V/mil)	450	450	450	400	400
(kV/mm)	18	18	18	16	16
Dielectric constant <sup>3)</sup>					
at 60 Hz	1.2	1.2	1.2	1.3	1.3
at 1 kHz	1.3	1.3	1.3	1.4	1.4
Dissipation factor <sup>3)</sup>					
at 60 Hz (x10 <sup>-3</sup> )	3	3	3	3	3
at 1 kHz (x10 <sup>-3</sup> )	5	5	5	5	5

<sup>1)</sup> ASTM D-149 using 50 mm (2 inches) electrodes, rapid rise; corresponds with IEC 243-1 subclause 9.1 except for electrode set-up of 50 mm (2 inches)

<sup>2)</sup> ASTM D-3426

<sup>3)</sup> ASTM D-150

## Chemical stability

The compatibility of NOMEX® paper and press-board with virtually all classes of electrical varnishes and adhesives (polyimides, silicones, epoxies, polyesters, acrylics, phenolics, synthetic rubbers, etc.), as well as other components of electrical equipment, is demonstrated by the many UL-recognized systems comprising NOMEX®, as well as longstanding commercial experience. NOMEX® papers are also fully compatible (and in commercial use) with transformer fluids (mineral and silicone oils and other synthetics), lubricating oils and refrigerants used in hermetic systems. Common industrial solvents (alcohols, ketones, acetone, toluene, xylene) have a slight softening and swelling effect on NOMEX® Type 411 paper, similar to that of water. These effects are largely reversible when the solvent is removed.

The Limiting Oxygen Index (LOI) of NOMEX® Type 411 – 0.13 mm (5 mil) paper at room temperature is 28.5%, and is 21.8% at 220°C. Materials with LOI above 20.8% (ambient air) will not support combustion. NOMEX® Type 411 – 0.13 mm (5 mil) must be heated to above 240°C before its LOI declines below the flammability threshold, as is shown in Figure 1. NOMEX® Type 411 paper offers improved saturability of varnishes and resins versus NOMEX® Type 410 paper due to its more open structure. The exact amount of improvement depends on the specific varnish, application technique, and product thickness. In one test, with hand-dipped varnish, this resulted in a 40% saturability improvement of NOMEX® Type 411 versus NOMEX® Type 410, whereas with vacuum-pressure impregnation, the saturability improvement was as high as 200%.

Table II – **TYPICAL MECHANICAL PROPERTIES**


Nominal thickness (mil) (mm)		<b>5</b> <b>0.13</b>	<b>7</b> <b>0.18</b>	<b>10</b> <b>0.25</b>	<b>15</b> <b>0.38</b>	<b>23</b> <b>0.58</b>	Test method
Typical thickness <sup>1</sup> (mil) (mm)		<b>5.5</b> <b>0.14</b>	<b>8.1</b> <b>0.20</b>	<b>10.2</b> <b>0.26</b>	<b>16.8</b> <b>0.43</b>	<b>26.0</b> <b>0.66</b>	TAPPI-411
Basis weight (g/m <sup>2</sup> )		<b>42</b>	<b>64</b>	<b>82</b>	<b>134</b>	<b>205</b>	ASTM D-646
Density (g/cc)		<b>0.30</b>	<b>0.31</b>	<b>0.31</b>	<b>0.31</b>	<b>0.31</b>	
Tensile strength (N/cm)	MD	<b>18</b>	<b>27</b>	<b>35</b>	<b>55</b>	<b>71</b>	ASTM D-828
	XD	<b>9</b>	<b>14</b>	<b>20</b>	<b>33</b>	<b>47</b>	
Elongation (%)	MD	<b>3.6</b>	<b>3.8</b>	<b>3.4</b>	<b>3.7</b>	<b>3.2</b>	ASTM D-828
	XD	<b>4.8</b>	<b>5.6</b>	<b>5.2</b>	<b>5.3</b>	<b>3.9</b>	
Elmendorf Tear (N)	MD	<b>1.1</b>	<b>1.6</b>	<b>1.9</b>	<b>4.1</b>	<b>7.4</b>	TAPPI-414
	XD	<b>1.5</b>	<b>2.5</b>	<b>2.5</b>	<b>5.8</b>	<b>9.4</b>	
Initial tear strength <sup>2</sup> (N)	MD	<b>7</b>	<b>10</b>	<b>13</b>	<b>21</b>	<b>30</b>	ASTM D-1004
	XD	<b>4</b>	<b>5</b>	<b>8</b>	<b>14</b>	<b>21</b>	
Shrinkage at 240°C (%)	MD	<b>0.6</b>	<b>0.6</b>	<b>0.6</b>	<b>0.6</b>	<b>0.5</b>	
	XD	<b>0.7</b>	<b>0.7</b>	<b>0.9</b>	<b>0.3</b>	<b>0.2</b>	

<sup>1</sup> Method D; using 5 N/cm<sup>2</sup>

<sup>2</sup> Data presented for Initial Tear Strength is listed in the direction of the sample per ASTM D-1004. The tear is 90 degrees to sample direction — hence for papers with a higher reported MD ITR, the paper will be tougher to tear in the cross direction.

MD = machine direction of paper  
XD = cross direction of paper

**FIGURE 1 – LIMITING OXYGEN INDEX (LOI)  
NOMEX® TYPE 411 – 0.13 MM (5 MIL)**

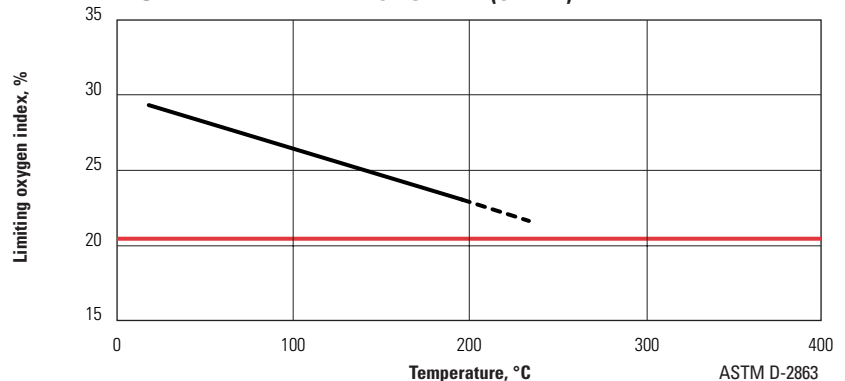

### USA

DuPont  
Advanced Fibers Systems  
Customer Inquiry Center  
5401 Jefferson Davis Highway  
Richmond, VA 23234  
Tel: (800) 453-8527, (804) 383-4400  
Fax: (800) 787-7086, (804) 383-4132  
E-mail: afsctd@usa.dupont.com

### CANADA

DuPont Canada, Inc.  
Advanced Fibers Systems  
P.O. Box 2200  
Streetsville Postal Station  
Mississauga, Ontario, L5M 2H3, Canada  
Tel: (800) 387-2122, (905) 821-5193  
Fax: (905) 821-5177  
E-mail: products@can.dupont.com

### EUROPE

DuPont de Nemours International S.A.  
Advanced Fibers Systems  
P.O. Box 50  
CH-1218 Le Gran-Saconnex  
Geneva, Switzerland  
Tel: +41-22-717-5111  
Fax: +41-22-717-6218  
E-mail: info.nomex@che.dupont.com

### SOUTH AMERICA

DuPont do Brasil S.A.  
Alameda Itapecuru, 506  
BR-06454-080 Alphaville  
Barueri, São Paulo  
Brasil  
Tel: +0800-17-17-15, +55 11 4166 8449  
Fax: +55 11 7266 8904  
E-mail: produtos.brasil@bra.dupont.com

### JAPAN

DuPont Teijin Advanced Papers (Japan) Limited  
ARCO Tower,  
8-1 Shimomeguro I-chome  
Meguro-ku, Tokyo 153-0064  
Japan  
Tel: +81-3-5434-6609  
Fax: +81-3-5434-6605  
E-mail: chihiro.kondo@jpn.dupont.com

### ASIA PACIFIC

DuPont Teijin Advanced Papers (Asia) Limited  
1122 New World Office Building, East Wing  
24 Salisbury Road  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: +852-2734-5363  
Fax: +852-2734-5486  
E-mail: nomexpaper@hkg.dupont.com

[www.dupont.com/nomex](http://www.dupont.com/nomex)

**Product safety information is available upon request.** This information corresponds to our current knowledge on the subject. It is offered solely to provide possible suggestions for your own experiments. It is not intended, however, to substitute for any testing you may need to conduct to determine for yourself the suitability of our products for your particular purposes. This information may be subject to revision as new knowledge and experience becomes available. Since we cannot anticipate all variations in actual end-use conditions, DUPONT MAKES NO WARRANTIES AND ASSUMES NO LIABILITY WHATSOEVER IN CONNECTION WITH ANY USE OF THIS INFORMATION. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent right.

© Copyright 2003 E.I. du Pont de Nemours and Company. All rights reserved. The DuPont oval logo, The miracles of science® DuPont®, and NOMEX® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.

H-93498-3 Rev. 04/03 Printed in USA



The miracles of science®