


# DuPont™ Tyvek® Protec™ 160

Synthetic Roofing Underlayment with Industry-Leading Walkability

## OVERVIEW

### Description

DuPont™ Tyvek® Protec™ is a portfolio of engineered synthetic roofing underlayment's featuring a unique embossed non-woven technology from the trusted name in total building envelope solutions. Tyvek® Protec™ 160's four-layer construction provides industry-leading walkability in dry, wet, hot, cold and dirty conditions, ideal for slopes 2:12 or higher under a variety of roofing materials in repair, re-roofing and new construction.

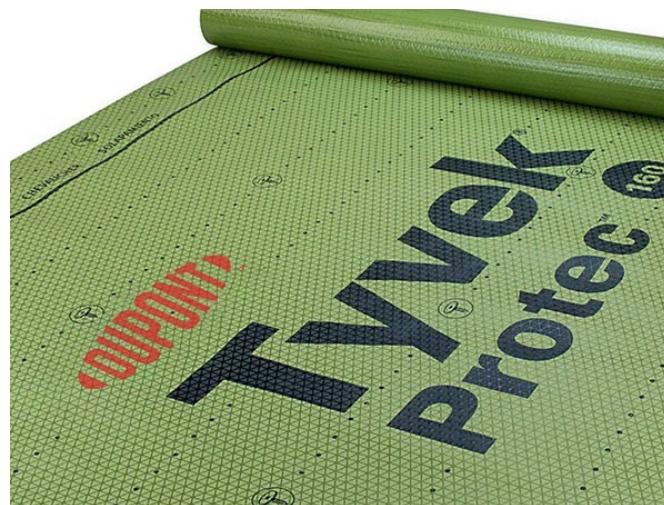

### Features and Benefits

- Ease of Installation:** Top layer features grooves for dirt and water flow. Lamination layer acts as a water barrier. Woven polypropylene scrim provides added strength. Slip-resistant coating provides grip to the roof deck. Preserves the roof deck during installation and provides an effective secondary moisture barrier. Lays flat and stays flat for a more uniform shingled surface. Accepts and holds chalk marks for more visible lines and a better finished product.

### Complete System

- Tyvek® Protec™ 160 is part of a portfolio of engineered synthetic roofing underlays that also includes Tyvek® Protec™ 120 and Tyvek® Protec™ 200.

### Standard Sizes

Standard Sizes for Tyvek® Protec™ 160

Unit	Width	Length
Roll	48 in.	250 ft.

## TESTING AND CODE COMPLIANCE

Tyvek® Protec 160 exhibits the properties and characteristics indicated in the table below when tested as represented. Review all instructions and (Material) Safety Data Sheet ((M)SDS) before use. Please contact your local DuPont™ Tyvek Specialist before writing specifications around this product. Product properties are as follows:

TEST METHOD	TEST TITLE	PROPERTY	RESULTS
<b>FIRE</b>			
ASTM E108	Standard Test Methods for Fire Tests of Roof Coverings	Fire Rating - Class A	Pass
<b>STRENGTH</b>			
ASTM D4533	Standard Test Method for Trapezoid Tearing Strength of Geotextiles	Tear strength (MD / CD)	MD: 30 lbf CD: 35 lbf

WATER			
ASTM E96	Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials	Permeability	<0.05 Perms
GENERAL			
ASTM D1777	Standard Test Method for Thickness of Textile Materials	Nominal Thickness	0.379 mm 14.9 mils
ASTM D751	Standard Test Methods for Coated Fabrics	Tensile strength (MD / CD)	MD: 96.8 lbf CD: 95.4 lbf
ASTM D751	Standard Test Methods for Coated Fabrics	Elongation (MD / CD)	MD: 20.3 % CD: 19.4 %

## CODE COMPLIANCE

Tyvek® Protec 160 complies with the following codes:

CODE	DESCRIPTION
Regional Code Listings & Reports	FBC, HVHZ, Miami-Dade
CAN Code Reports	ICC-ES AC188, per Intertek CCRR-0394
CAN Product Listings & Verifications	ASTM D8257 ASTM E108 ICC-ES AC188



For more information, visit us at  
[building.dupont.com](http://building.dupont.com)  
 or call us at 1-833-338-7668

**NOTICE:** No freedom from any patent owned by DuPont or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries or regions. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO EXPRESS WARRANTIES ARE GIVEN EXCEPT FOR ANY APPLICABLE WRITTEN WARRANTIES SPECIFICALLY PROVIDED BY DUPONT. ALL IMPLIED WARRANTIES INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. The buyer assumes all risks as to the use of the material. Buyers exclusive remedy or any claim (including without limitations, negligence, strict liability, or tort) shall be limited to the refund of the purchase price of the material. Failure to strictly adhere to any recommended procedures shall release DuPont de Nemours, Inc. or its affiliates of all liability with respect to the materials or the use thereof. The information herein is not intended for use by non-professional designers, applicators or other persons who do not purchase or utilize this product in the normal course of their business. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with™, SM or® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2025 DuPont. All rights reserved. 43-D100052-enNA-0625 CDP

Issue Date: 9/22/2025

Print Date: 12/01/2025