

DuPont™ Tyvek® HomeWrap®

The world's leading housewrap, with more than 25 years performance on millions of homes.

DuPont created Tyvek® HomeWrap® to have the optimum balance of properties for superior performance against the elements and the competition. When choosing Tyvek® HomeWrap®, you can be assured you are using the leading brand of water-resistant barriers.



DuPont™ Tyvek® HomeWrap® helps builders protect the homes they construct.


A water-resistive barrier is a home's main protection against the damaging effects of the elements. The optimal water-resistive barrier must include four key properties:

- Air resistance to help prevent the flow of air through wall cavities and reduce drafts.
- Moisture resistance to help protect the wall cavity from water that gets behind the cladding.
- Moisture vapor permeability to promote drying of wall systems.
- Durability to withstand the rigors of the construction site and to continue performing once construction is completed.

A balance of these four properties is crucial in helping to maintain the protection, comfort and efficiency of a home.

Defining the difference

DuPont™ Tyvek® HomeWrap® is a nonwoven, nonperforated sheet made by spinning extremely fine, continuous, high-density polyethylene (HDPE) fibers that are fused together to form a strong, uniform web. The fibrous structure is engineered to create millions of microscopic pores that resist bulk water and air penetration while allowing moisture vapor to pass through. Tyvek® HomeWrap® is the only product manufactured using this unique process; therefore, only Tyvek® HomeWrap® achieves the optimal balance of air resistance, water resistance and moisture vapor permeability. Other water-resistive barriers compromise such features as bulk water hold-out for vapor permeability, or vapor permeability for air resistance.

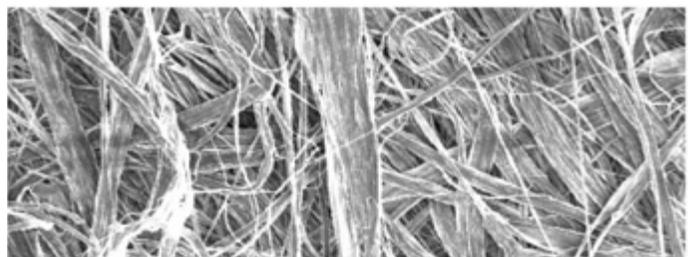

Tyvek® at 75x magnification. The microscopic pores in Tyvek® HomeWrap® help keep water from infiltrating the wall cavity.

Air penetration resistance

One basic function of a water-resistive barrier is to help insulation maintain its R-value by keeping air from infiltrating the wall system. The ability of a water-resistive barrier in helping to prevent air infiltration directly relates to the energy costs of heating and cooling a home. Many housewraps fail to meet the basic air barrier requirement of < 0.06 cfm/ft². The high air resistance level of DuPont™ Tyvek® HomeWrap® allows insulation to be more effective, helping to lower energy costs. (Figure 1)

Bulk water hold-out and vapor permeability

The building industry continues to face challenges with moisture-related issues resulting from wall systems that failed to manage the incidental moisture that enters and cannot escape a wall cavity. High bulk water resistance and high drying potential are key components of creating the optimal wall system. Tyvek® HomeWrap® has a high resistance to bulk water penetration, helping to reduce the damaging effects of moisture penetration. (Figure 2)

At the same time, the high Moisture Vapor Transmission Rate (MVTR) of Tyvek® HomeWrap® ensures that water vapor does not linger in the walls, but passes to the outside where it belongs (Figure 2). A water-resistive barrier should have a high perm rating so that the natural ability of a wall system to dry out is not impeded. The excellent moisture vapor permeability of Tyvek® HomeWrap® helps prevent moisture accumulation in walls which can lead to the formation of mold, mildew and wood rot.

Durability

Tyvek® HomeWrap® provides excellent tear strength and good wet strength combined with a superior UV resistance of 120 days. Conscientious builders choose Tyvek® HomeWrap® over any other product because it withstands the rigors of the construction site and offers an easy solution to protect the homes they build from the harmful effects of the elements once construction is completed.

DuPont Residential Warranty

DuPont™ Tyvek® Weatherization Systems come backed by a 10-year limited warranty, providing added assurance that the homes builders construct will continue to protect the homeowner's investment for years to come.

Our Specialist Network

A national group of over 180 highly-trained field representatives is available to assist you with your installations. From the latest updates on building codes, to on-site consulting and training, your local Tyvek® Specialist will help make sure the job gets done right.

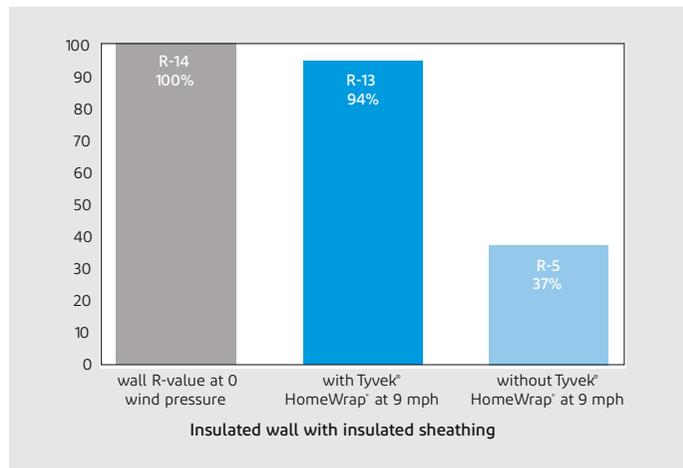


Figure 1: Installed R-value at 9 mph wind pressure with and without Tyvek® HomeWrap®

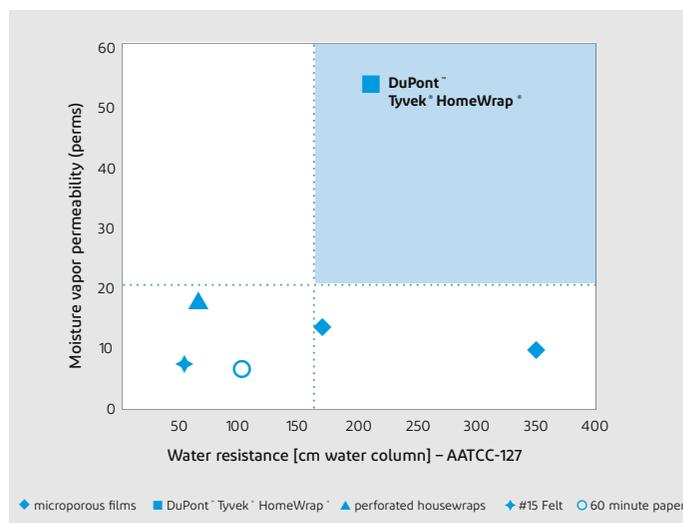


Figure 2: Water resistance and moisture vapor permeability graph

The ability to hold out bulk water is one of the most basic and important requirements of any water-resistive barrier. Allowing moisture vapor to escape the wall system is also crucial to managing moisture.



For more information visit
building.dupont.com
or call 1-800-44-Tyvek

NOTICE: No freedom from infringement of any patent owned by DuPont or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. The buyer assumes all risks as to the use of the material. Buyer's exclusive remedy or any claim (including without limitations, negligence, strict liability, or tort) shall be limited to the refund of the purchase price of the material. Failure to strictly adhere to any recommended procedures shall release DuPont of all liability with respect to the materials or the use thereof. The information herein is not intended for use by non-professional designers, applicators or other persons who do not purchase or utilize this product in the normal course of their business. CAUTION: This product is combustible and shall only be used as specified by the local building code with respect to flame spread classification and to the use of a suitable thermal barrier. For more information, consult (Material) Safety Data Sheet ((M)SDS), call DuPont at 1-866-583-2583 or contact your local building inspector. In an emergency, call 1-989-636-4400.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2019 DuPont.