


DuPont™ Tyvek® CommercialWrap®

Covers All the Bases in St. Louis Ballpark Village

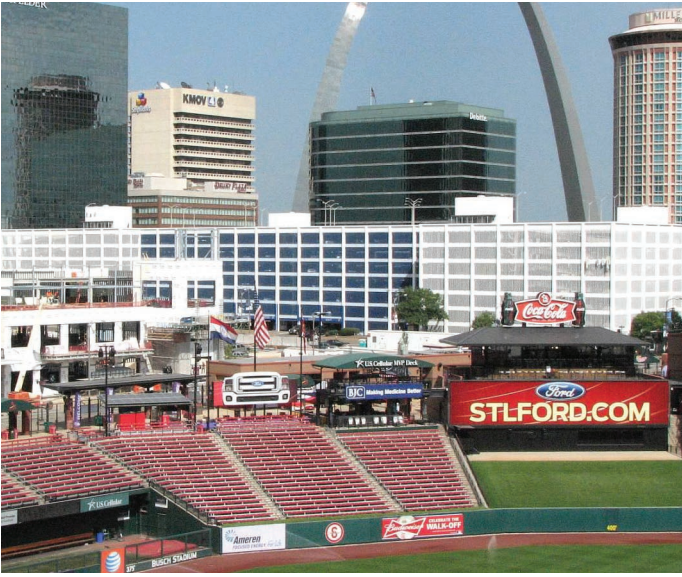

Project Credits:

Project: St. Louis Ballpark Village
 Project Size: 700,000 ft²
 Project Type: Mixed use, New Construction
 Location: St. Louis, Missouri
 Architect: Design Collective, Inc.
 General Contractor: PARIC Corporation
 Owner: The Cordish Companies

DuPont™ Tyvek® Certified Installer:

Hoelscher Interiors, Inc.

DuPont Products Used On This Project:

- DuPont™ Tyvek® CommercialWrap®
- DuPont™ StraightFlash™
- DuPont™ FlexWrap™

The Goal:

Spanning seven city blocks on the 10-acre site just north of Busch Stadium—home of the 11-time World Series Champion Cardinals—the St. Louis Ballpark Village is the country's first fully-integrated mixed-use development, designed to deliver the excitement and energy of the game day experience to a new neighborhood outside the stadium walls.

The Challenge:

St. Louis, straddles two climates. It is subject to both cold arctic air and hot, humid tropical air from the Gulf of Mexico. With an average of 48 days of thunderstorms and 41 inches of precipitation per year, along with hot, humid summers and wintry rain, St. Louis has more than its share of severe weather which requires a high-performing weather barrier system.

The Solution:

The construction team specified an air and water barrier system that includes DuPont™ Tyvek® CommercialWrap® to help ensure a sealed, protective building envelope.

In addition to the many benefits of the product itself, the team cited the support of the local DuPont™ Tyvek® Specialist who provided technical support for the project in the form of field observations, pre-construction meetings, and attendance at mock-up evaluations.





**For more information, please visit
tyvek.com or call 1-800-448-9835.**

NOTICE: No freedom from any patent owned by DuPont or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries or regions. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO EXPRESS WARRANTIES ARE GIVEN EXCEPT FOR ANY APPLICABLE WRITTEN WARRANTIES SPECIFICALLY PROVIDED BY DUPONT. ALL IMPLIED WARRANTIES INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. The buyer assumes all risks as to the use of the material. Buyer's exclusive remedy or any claim (including without limitations, negligence, strict liability, or tort) shall be limited to the refund of the purchase price of the material. Failure to strictly adhere to any recommended procedures shall release DuPont Specialty Products USA, LLC or its affiliates, of all liability with respect to the materials or the use thereof. The information herein is not intended for use by non-professional designers, applicators or other persons who do not purchase or utilize this product in the normal course of their business.

CAUTION: When cured, these products are combustible and will burn if exposed to open flame or sparks from high-energy sources. Do not expose to temperatures above 240°F (116°C). For more information call the DuPont Contact Center at 866-583-2583 or contact your local building inspector. For emergencies contact Chemtrec 800-424-9300, CCN (Contract Number) 7442. The blowing agent contained within this product can exhibit vapor flame limits under the right conditions. If specific operating conditions are such that concentrations of the blowing agent above the lower flammable limit can accumulate in areas with high relative humidity and in the presence of high-energy electrical discharges or other ignition sources, additional measures such as increased ventilation or coded electrical equipment (class one, division two) may be warranted. DO NOT SMOKE DURING USE. DO NOT USE NEAR ANY OPEN FLAME OR ELECTRICAL SOURCE. OUTDOOR USE ONLY. INDOOR USE INCREASES LIKELIHOOD OF IGNITABLE CONDITIONS. INSTASTIK™ Quik Set Commercial Roofing Adhesive contains isocyanate and a blowing agent. Read the label and (Material) Safety Data Sheet ((M)SDS) carefully before use. Wear gloves, and goggles or safety glasses. Provide adequate ventilation or wear proper respiratory protection. Contents under pressure. For outside use only.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2023 DuPont

43-D100818-enNA-0523