

DuPont™ Tyvek® Commercial Wrap Caps

The Wrap Cap Screw for Commercial Steel Stud Applications

FEATURES AND BENEFITS

Description

Why use a DuPont™Tyvek® Commercial Wrap Cap with a screw? Quality contractors and installers have been asking for an easy way to secure Tyvek® products to steel studs. They also asked for increased holding power. That's why we designed the Tyvek® Commercial Wrap Cap Screw as the solution for quality commercial and steel stud installations.

The Tyvek® Commercial Wrap Cap Screw is a full drill point screw with an attached 2" plastic cap for use in steel stud applications (12 gauge to 20 gauge). It is recommended for fastening any Tyvek® product – and ideal for commercial applications.

Wrap Cap Screws with a 2" plastic disc reduce the potential for jobsite blow-off of wrap, delivering increased fastener holding power over traditional 1" plastic and metal caps.

Ease of Use

1¾" Steel Stud Screw

- Can be applied by hand or drill
- Self-tapping drill point screw, #8 shank with a modified truss head style (Phillips head)
- Screws are coated with an organic fluoropolymer for improved rust protection
- · Drill bit included in each box, for ease of installation
- Screws are ore-attached to Wrap Caps for quick installation


2" Wrap Cap

- Constructed of high-density polyethylene with UV inhibitors
- Large diameter cap increases fastener holding power, reducing the potential for job-site blow-off of wrap
- Large plastic cap provides additional protection around fastener penetrations
- Large diameter cap permits easy handling and installation



TABLE 1: Product Specifications for Tyvek® Commercial Wrap Caps

Product	Туре	Screw Length	Box Count	Box OD (lwd)	Weight Each
2" Dia. Wrap Cap Screws	Hand Drive or Electric Drive	1 ³ / ₄ "	1000	12"x 12" x 14"	14.5 lb

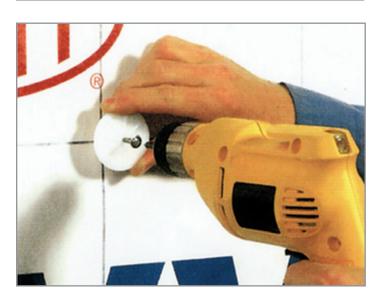



For more information visit building.dupont.com or call 1-833-338-7668

NOTICE: No freedom from any patent owned by DuPont or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries or regions. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO EXPRESS WARRANTIES ARE GIVEN EXCEPT FOR ANY APPLICABLE WRITTEN WARRANTIES SPECIFICALLY PROVIDED BY DUPONT. ALL IMPLIED WARRANTIES INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. The buyer assumes all risks as to the use of the material. Buyer's exclusive remedy or any claim (including without limitations, negligence, strict liability, or tort) shall be limited to the refund of the purchase price of the material. Failure to strictly adhere to any recommended procedures shall release DuPont Specialty Products USA, LLC or its affiliates, of all liability with respect to the materials or the use thereof. The information herein is not intended for use by non-professional designers, applicators or other persons who do not purchase or utilize this product in the normal course of their business.

CAUTION: This product is combustible. Protect from high heat sources. A protective barrier or thermal barrier may be required as specified in the appropriate building code. For more information, consult (Material) Safety Data Sheet ((M)SDS), call DuPont at 1-866-583-2583 or contact your local building inspector. In an emergency, call 1-989-636-4400 in the U.S. or 1-519-339-3711 in Canada.

WARNING: Rigid foam insulation does not constitute a working walkable surface or qualify as a fall protection product.